

## Good price Bernet 2 nozzles fuel dispenser for petrol service equipment station

Our Product Introduction

for more products please visit us on [fueldispensermachine.com](http://fueldispensermachine.com)


### Basic Information

- Place of Origin: Anhui China
- Brand Name: Bernet
- Certification: ISO9001.ATEX,UL,MID
- Model Number: BNT50S2226Y
- Minimum Order Quantity: 2PCS
- Price: \$1100.00-\$2000.00/pieces 10-100 pieces
- Packaging Details: 1PCS PER CARTON
- Delivery Time: 10-15days
- Payment Terms: L/C, T/T, Western Union, D/P
- Supply Ability: 100 Piece/Pieces per Month



### Product Specification

- Ambient Temperature: -40°C~+55°C
- Humidity: ≤95%
- Max Flow: 60L/min Or 80L/min
- Repeating Accuracy: ≤0.15%
- Inlet Vacuum: ≥54kpa
- Line: 1 To 2 Line
- Nozzle: 1 To 2
- Noise: ≤70dB(A Class)
- Single Package Size: 105X65X230 Cm
- Single Gross Weight: 200.000 Kg
- Highlight: petrol service equipment fuel dispenser, Good price fuel dispenser, 2 nozzles fuel dispenser

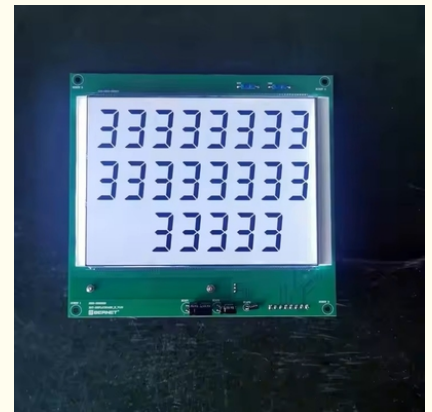

### More Images



## Product Description

Good price Bernet 2 nozzles fuel dispenser for petrol service equipment station

### Advanced Fuel Dispenser Specifications

The modern fuel dispenser is designed to operate efficiently under extreme conditions, with an ambient temperature range of -40°C to +55°C and humidity levels up to 95%. This ensures reliable performance in diverse environments. The fuel dispenser supports a maximum flow rate of 60L/min or 80L/min, catering to high-demand applications while maintaining precision.

With a repeating accuracy of  $\leq 0.15\%$ , the fuel dispenser guarantees consistent and accurate fuel delivery. Its inlet vacuum capability of  $\geq 54\text{kPa}$  ensures optimal performance, while noise levels remain below 70dB(A class), making it suitable for urban and residential areas. The fuel dispenser offers a single measurement range of 1~9900.00, providing flexibility for various fueling needs.

Equipped with 1 to 2 solenoid valves, 1 to 2 lines, and 1 to 2 nozzles, the fuel dispenser can be customized for different fueling configurations. Its robust design and advanced technology make it a reliable choice for gas stations and commercial fueling operations.

The fuel dispenser is engineered for durability, precision, and user convenience, meeting the highest industry standards.

Whether in freezing cold or scorching heat, the fuel dispenser delivers consistent performance. Its efficient design ensures minimal noise and maximum accuracy, making it an ideal solution for modern fueling needs.

In summary, the fuel dispenser combines cutting-edge technology with rugged construction, offering unmatched reliability and precision in fuel dispensing. The fuel dispenser is the perfect choice for businesses seeking efficiency, accuracy, and long-term performance.

### Product Parameters:

Features	Flow rate Options	Standard Flow (Gasoline/Diesel)	High Flow (Diesel)
	Delivery speed	45L/min	60~80L/min
	Market Availability	Middle East, Africa & South East Asia	Middle East, Africa & South East Asia
	Approvals	ATEX, MID, OIML, SONCAP	
	Fuel Compatibility	Up to 10% Ethanol content & 5% Biodiesel content	

	M a x N u m b e r o f F u e l G r a d e s / M e t e r s	2 Grades / 2 Meters	
	H o s e M a n a g e m e n t	Easy Hose with Non-obstructing Money Volume Display View	
	P u m p S t o p ( o p t i o n )	√	√
	N o i s e L e v e l - 6 5 d B ( S u c t i o n M o d e l )	√	√

H y d r a u l i c O p t i o n s	M e t e r i n g U n i t	Bernet piston Meter with improved e-Calibration	Bernet piston Meter with improved e-Calibration
	P u l s a r	Option (Secure pulsar with lift-off detection )	Option (Secure pulsar with lift-off detection )
	M o t o r ( S u c t i o n M o d e l )	Standard: 1phase, 220-240 Vac   option : 3 Phase, 380 - 440 Vac	Standard: 1 phase, 220-240 Vac   option : 3 Phase, 380 - 440 Vac
	P u m p F i l t e r T y p e	Standard: Washable   Option: Replaceable	Standard: Washable   Option: Replaceable
	M e t e r F i l t e r T y p e	Standard: Washable   Option: Replaceable	Standard: Washable   Option: Replaceable
	P u m p i n g U n i t	Standard:Vane Option: Gear	Standard: Vane   Option: Gear

	D i s p l a y T e c h n o l o g y	High Contrast LCD Display with direct sunlight readability	High Contrast LCD Display with direct sunlight readability
E l e c t r o n i c O p t i o n s	D i s p l a y S i z e	Money :8 digits with floating decimals (99,999,999) 40 mm height	888888.88
		Volume :8 digits with floating decimals (9,999,999), 40 mm height	
		PpU : 6 digits with floating decimals (999,999), 25 mm height/option: 5 digits with floating decimals (999,999), 25 mm height	
	K e y p a d	Film keypad/option:stainless steel keypad	Film keypad/option:Stainless Steel keypad
	P o S C o n n e c t i v i t y	Bernet Wire Protocol   option: IFSF Protocol	
	E l e c t r o n i c s P o w e r S u p p l y	Single Phase, Standard: 90 Vac - 260Vac   Option: 90 Vac - 380Vac	

	T o t a l i z e r ( C u m u l a t i v e & D a i l y )	12 Digits (99gg999999.999)	
	Ti c k e t P r i n t e r ( O p t i o n )	√	√
	M o t o r O v e r- v o l t a g e P r o t e c t i o n	√	√

E l e c t r o n i c a l l y A d j u s t a b l e F l o w r a t e ( O p t i o n )	√	√
E l e c t r o m e c h a n i c a l T o t a l i z e r ( O p t i o n )	Enhanced Security EMT   7 digit Totalizer (9999999) with 1 Liter resolution	

What'sapp:+8619314084039      Gmail:bernet0006@gmail.com